


## WIT-UH 300 WITH THREADED ROD (METRIC)



280 ml

420 ml

825 ml



Galvanized (5 microns): M8 - M30



Stainless steel - A4 (AISI 316): M8 - M30

### Approved for:

Concrete C20/25 to C50/60, non-cracked & cracked

### Suitable for:

Concrete C12/15, Natural stone with dense structure

| Cartridge sizes |              | Art. no.            |
|-----------------|--------------|---------------------|
| 280 ml          | peeler       | <b>5918 504 280</b> |
| 420 ml          | coaxial      | <b>5918 500 420</b> |
| 825 ml          | side-by-side | <b>5918 503 825</b> |

### Type of installation

| Pre-positioned | In-place | Stand-off |
|----------------|----------|-----------|
| ✓              | ✓        | ✓         |

### Installation condition

| Dry concrete | Wet concrete | Flooded drill hole |
|--------------|--------------|--------------------|
| ✓            | ✓            | ✓                  |

### Drilling method

| Hammer drill | Diamond drill | Hollow drill |
|--------------|---------------|--------------|
| ✓            | -             | ✓            |

### Applications



### Approvals and certificates



| Description                   | Authority/laboratory | Guideline for assessment     | No./date of issue       |
|-------------------------------|----------------------|------------------------------|-------------------------|
| European Technical Assessment | DIBt, Berlin         | EAD 330499-01-0601           | ETA-17/0127, 13.11.2020 |
| ICC-ES Evaluation Report      | ICC                  | AC 308                       | ESR-4466, 01.10.2019    |
| Fire resistance               | Ingenieurbüro Thiele | TR 020                       | 210807, 09.02.2018      |
| LEED                          | euofins              |                              | 16.03.17                |
| VOC Emissions Test report     | euofins              | DEVL 1101903D, DEVL 1104875A | 16.03.17                |
| NSF International             | NSF International    | NSF/ANSI Standard61          | 02.01.20                |

## Basic load data (for a single anchor)

### All data in this section applies when:

- Installation is correct (see installation instructions)
- No edge distance and spacing influence
- Base material thickness and embedment depth are according to anchor characteristics
- Anchor material, as specified in the tables, steel grade 5.8
- Concrete C 20/25,  $f_{ck} = 20 \text{ N/mm}^2$
- Concrete C 50/60,  $f_{ck} = 60 \text{ N/mm}^2$
- Temperature range I (min. base material temperature  $-40^\circ\text{C}$ , max long term/short term base material temperature:  $+24^\circ\text{C}/40^\circ\text{C}$ ).
- Dry or wet conditions of drill hole, hammer drilling

### Characteristic resistance

| Thread size                 |                      |          |      | <b>M8</b> | <b>M10</b> | <b>M12</b> | <b>M16</b> | <b>M20</b> | <b>M24</b> | <b>M27</b> | <b>M30</b> |
|-----------------------------|----------------------|----------|------|-----------|------------|------------|------------|------------|------------|------------|------------|
| Effective anchorage depth   |                      | $h_{ef}$ | [mm] | 80        | 90         | 110        | 125        | 170        | 210        | 240        | 270        |
| <b>Non-cracked concrete</b> |                      |          |      |           |            |            |            |            |            |            |            |
| Tension                     | C20/25               | $N_{Rk}$ | [kN] | 18.3      | 29.0       | 42.2       | 68.8       | 109.0      | 149.7      | 182.9      | 218.2      |
|                             | C50/60               |          |      | 18.3      | 29.0       | 42.2       | 78.5       | 122.5      | 176.5      | 229.5      | 280.5      |
| Shear                       | $\geq \text{C20/25}$ | $V_{Rk}$ | [kN] | 8.8       | 13.9       | 20.2       | 37.7       | 58.8       | 84.7       | 110.2      | 134.6      |
| <b>Cracked concrete</b>     |                      |          |      |           |            |            |            |            |            |            |            |
| Tension                     | C20/25               | $N_{Rk}$ | [kN] | 14.1      | 21.2       | 33.2       | 48.1       | 76.3       | 104.8      | 128.0      | 152.8      |
|                             | C50/60               |          |      | 15.5      | 23.3       | 36.5       | 62.2       | 99.9       | 121.9      | 156.8      | 195.9      |
| Shear                       | $\geq \text{C20/25}$ | $V_{Rk}$ | [kN] | 11.0      | 17.4       | 25.3       | 47.1       | 73.5       | 105.9      | 137.7      | 168.3      |

### Design resistance

| Thread size                 |                      |          |      | <b>M8</b> | <b>M10</b> | <b>M12</b> | <b>M16</b> | <b>M20</b> | <b>M24</b> | <b>M27</b> | <b>M30</b> |
|-----------------------------|----------------------|----------|------|-----------|------------|------------|------------|------------|------------|------------|------------|
| Effective anchorage depth   |                      | $h_{ef}$ | [mm] | 80        | 90         | 110        | 125        | 170        | 210        | 240        | 270        |
| <b>Non-cracked concrete</b> |                      |          |      |           |            |            |            |            |            |            |            |
| Tension                     | C20/25               | $N_{Rd}$ | [kN] | 12.2      | 19.3       | 28.1       | 45.8       | 72.7       | 99.8       | 121.9      | 145.5      |
|                             | C50/60               |          |      | 12.2      | 19.3       | 28.1       | 52.3       | 81.7       | 117.7      | 153.0      | 187.0      |
| Shear                       | $\geq \text{C20/25}$ | $V_{Rd}$ | [kN] | 8.8       | 13.9       | 20.2       | 37.7       | 58.8       | 84.7       | 110.2      | 134.6      |
| <b>Cracked concrete</b>     |                      |          |      |           |            |            |            |            |            |            |            |
| Tension                     | C20/25               | $N_{Rd}$ | [kN] | 9.4       | 14.1       | 22.1       | 32.1       | 50.9       | 69.9       | 85.4       | 101.8      |
|                             | C50/60               |          |      | 10.3      | 15.6       | 24.3       | 41.5       | 66.6       | 81.3       | 104.5      | 130.6      |
| Shear                       | $\geq \text{C20/25}$ | $V_{Rd}$ | [kN] | 8.8       | 13.9       | 20.2       | 37.7       | 58.8       | 84.7       | 110.2      | 134.6      |

## WIT-UH 300 WITH THREADED ROD (METRIC)

### Recommended/ allowable loads <sup>1)</sup>

| Thread size                 |               |           |      | <b>M8</b> | <b>M10</b> | <b>M12</b> | <b>M16</b> | <b>M20</b> | <b>M24</b> | <b>M27</b> | <b>M30</b> |
|-----------------------------|---------------|-----------|------|-----------|------------|------------|------------|------------|------------|------------|------------|
| Effective anchorage depth   |               | $h_{ef}$  | [mm] | 80        | 90         | 110        | 125        | 170        | 210        | 240        | 270        |
| <b>Non-cracked concrete</b> |               |           |      |           |            |            |            |            |            |            |            |
| Tension                     | C20/25        | $N_{rec}$ | [kN] | 8.7       | 13.8       | 20.1       | 32.7       | 51.9       | 71.3       | 87.1       | 103.9      |
|                             | C50/60        |           |      | 8.7       | 13.8       | 20.1       | 37.4       | 58.3       | 84.0       | 109.3      | 133.6      |
| Shear                       | $\geq C20/25$ | $V_{rec}$ | [kN] | 6.3       | 9.9        | 14.5       | 26.9       | 42.0       | 60.5       | 78.7       | 96.2       |
| <b>Cracked concrete</b>     |               |           |      |           |            |            |            |            |            |            |            |
| Tension                     | C20/25        | $N_{rec}$ | [kN] | 6.7       | 10.1       | 15.8       | 22.9       | 36.3       | 49.9       | 61.0       | 72.7       |
|                             | C50/60        |           |      | 7.4       | 11.1       | 17.4       | 29.6       | 47.6       | 58.1       | 74.6       | 93.3       |
| Shear                       | $\geq C20/25$ | $V_{rec}$ | [kN] | 6.3       | 9.9        | 14.5       | 26.9       | 42.0       | 60.5       | 78.7       | 96.2       |

<sup>1)</sup> Material safety factor  $\gamma_{Mk}$  and safety factor for action  $\gamma_t = 1.4$  are included. The material safety factor depends on the failure mode.

## Design method (simplified)

### Simplified version of the design method according to Eurocode 2 - Design of concrete structures - Part 4: Design of fastenings for use in concrete (EN 1992-4):

- Influence factors related to concrete strength, edge distance, spacing and others must be considered when applicable
- Valid for a group of anchors. The influencing factors must then be considered for each edge distance and spacing. The calculated design resistances are on the safe side. They will be lower than the exact values according to EN 1992-4. For an economical optimization, we recommend using the anchor design module of the Würth Technical Software II
- The design method is based on the simplification that no different loads are acting on individual anchors (no eccentricity)
- Temperature range 1 (min. base material temperature -40°C, max. long term/short term base material temperature: +24°C/40°C).
- Dry or wet conditions of drill hole, hammer drilling (Installation factors might apply for other drilling methods)
- Anchor material according to specifications, steel grade 5.8 unless otherwise stated in the tables

## I. Tension loading

The decisive design resistance in tension is the lowest value of the following failure modes:

1. Steel failure  $N_{Rd,s}$
2. Pull-out failure  $N_{Rd,p} = N_{Rd,p}^0 \cdot f_{b,N} \cdot f_{hef} \cdot f_{sx,p} \cdot f_{sy,p} \cdot f_{cx,1,p} \cdot f_{cx,2,p} \cdot f_{cy,p} \cdot f_{sus}$
3. Concrete cone failure  $N_{Rd,c} = N_{Rd,c}^0 \cdot f_{b,N} \cdot f_{hef} \cdot f_{sx} \cdot f_{sy} \cdot f_{cx,1} \cdot f_{cx} \cdot f_{cy}$
4. Concrete splitting failure  $N_{Rd,sp} = N_{Rd,sp}^0 \cdot f_{b;N} \cdot f_{hef} \cdot f_{sx,sp} \cdot f_{sy,sp} \cdot f_{cx,1,sp} \cdot f_{cx,2,sp} \cdot f_{cy,sp} \cdot f_h$

## 1. Design steel tensile resistance

Table 1: Design value of steel resistance under tension load  $N_{Rd,s}$  of a single anchor

| Thread size               |          |            | M8   | M10  | M12  | M16  | M20   | M24   | M27   | M30   |
|---------------------------|----------|------------|------|------|------|------|-------|-------|-------|-------|
| Effective anchorage depth | $h_{ef}$ | [mm]       | 80   | 90   | 110  | 125  | 170   | 210   | 240   | 270   |
| Design steel resistance   | 5.8      | $N_{Rd,s}$ | 12.2 | 19.3 | 28.1 | 52.3 | 81.7  | 117.7 | 153.0 | 187.0 |
|                           | 8.8      | $N_{Rd,s}$ | 19.3 | 30.7 | 44.7 | 83.3 | 130.7 | 188.0 | 245.3 | 299.3 |
|                           | A4       | $N_{Rd,s}$ | 13.9 | 21.9 | 31.6 | 58.8 | 91.4  | 132.1 | 80.4  | 98.3  |

# WIT-UH 300 WITH THREADED ROD (METRIC)

## 2. Design combined pull-out and concrete cone resistance

$$N_{Rd,p} = N_{Rd,p}^0 \cdot f_{b,N} \cdot f_{hef} \cdot f_{sx,p} \cdot f_{sy,p} \cdot f_{cx,1,p} \cdot f_{cx,2,p} \cdot f_{cy,p} \cdot f_{sus}$$

Table 2: Basic design resistance  $N_{Rd,p}^0$  in case of combined pull-out and concrete cone failure of a single anchor

| Thread size                                    |              |      | M8   | M10  | M12  | M16  | M20  | M24   | M27   | M30   |
|------------------------------------------------|--------------|------|------|------|------|------|------|-------|-------|-------|
| Effective anchorage depth                      | $h_{ef}$     | [mm] | 80   | 90   | 110  | 125  | 170  | 210   | 240   | 270   |
| <b>Non-cracked concrete</b>                    |              |      |      |      |      |      |      |       |       |       |
| Combined pull-out and concrete cone resistance | $N_{Rd,p}^0$ | [kN] | 22.8 | 32.0 | 44.2 | 62.8 | 99.7 | 137.2 | 176.4 | 220.5 |
| <b>Cracked concrete</b>                        |              |      |      |      |      |      |      |       |       |       |
| Combined pull-out and concrete cone resistance | $N_{Rd,p}^0$ | [kN] | 9.4  | 14.1 | 22.1 | 37.7 | 60.5 | 73.9  | 95.0  | 118.8 |

$$\bullet s_{cr,p} = 7.3 d (f_{sus} \cdot \tau_{rk})^{0.5} \leq 3h_{ef} \quad \bullet c_{cr,p} = s_{cr,p}/2$$

Where  $\tau_{rk}$  is the value  $\tau_{rk,ucr}$  for non-cracked concrete C20/25

Table 3: Characteristic edge distance  $c_{cr,p}$  and spacing  $s_{cr,p}$  ( $f_{sus} = 1$ )

| Thread size               |            |      | M8  | M10 | M12 | M16 | M20 | M24 | M27 | M30 |
|---------------------------|------------|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Effective anchorage depth | $h_{ef}$   | [mm] | 80  | 90  | 110 | 125 | 170 | 210 | 240 | 270 |
| Spacing                   | $s_{cr,p}$ | [mm] | 240 | 270 | 330 | 375 | 510 | 630 | 711 | 790 |
| Edge distance             | $c_{cr,p}$ | [mm] | 120 | 135 | 165 | 188 | 255 | 315 | 355 | 395 |

### a. Influence of concrete strength

Table 4: Influence of concrete strength on combined pull-out and concrete cone resistance

| Concrete strength classes (EN 206:2000)                                                       |               |                      | C12/15 | C16/20 | C20/25 | C25/30 | C30/37 | C35/45 | C40/50 | C45/55 | C50/60 |
|-----------------------------------------------------------------------------------------------|---------------|----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Characteristic compressive strength of concrete determined by testing cylinders <sup>1)</sup> | $f_{ck}$      | [N/mm <sup>2</sup> ] | 12     | 16     | 20     | 25     | 30     | 35     | 40     | 45     | 50     |
| Characteristic compressive strength of concrete determined by testing cube <sup>2)</sup>      | $f_{ck,cube}$ | [N/mm <sup>2</sup> ] | 15     | 20     | 25     | 30     | 37     | 45     | 50     | 55     | 60     |
| Influencing factor                                                                            | $f_{b,N}$     | [-]                  | 0.77   | 0.89   | 1.00   | 1.02   | 1.04   | 1.07   | 1.08   | 1.09   | 1.10   |

<sup>1)</sup> strength at 28 days of 150 mm diameter by 300 mm cylinders

<sup>2)</sup> strength at 28 days of 150 mm cubes

### b. Influence of embedment depth

$$f_{hef} = \frac{h_{ef}}{h_{ef,typ}}$$

Consider the approved range of embedment  $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$  according to the table „installation parameters“.

### c. Influence of spacing

$$f_{sx,p} = f_{sy,p} = \left( 1 + (n_{x(y)} - 1) \frac{s_{x(y)}}{s_{cr,p}} \right) \cdot \frac{1}{n_{x(y)}} \leq 1$$

Table 5: Influence of spacing on combined pull-out and concrete cone resistance

| Number of fixing per direction | $s/s_{cr,p}$ <sup>1)</sup> | 0.10 | 0.15 | 0.20 | 0.25 | 0.30 | 0.35 | 0.40 | 0.45 | 0.50 | 0.55 | 0.60 | 0.65 | 0.70 | 0.75 | 0.70 | 0.75 | 0.90 | 0.95 | $\geq 1.0$ |
|--------------------------------|----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------------|
| 2                              | $f_{sx,p} \quad f_{sy,p}$  | 0.55 | 0.58 | 0.60 | 0.63 | 0.65 | 0.68 | 0.70 | 0.73 | 0.75 | 0.78 | 0.80 | 0.83 | 0.85 | 0.88 | 0.85 | 0.88 | 0.95 | 0.98 | 1.00       |
| 3                              | $f_{sx,p} \quad f_{sy,p}$  | 0.40 | 0.43 | 0.47 | 0.50 | 0.53 | 0.57 | 0.60 | 0.63 | 0.67 | 0.70 | 0.73 | 0.77 | 0.80 | 0.83 | 0.80 | 0.83 | 0.93 | 0.97 | 1.00       |
| 4                              | $f_{sx,p} \quad f_{sy,p}$  | 0.33 | 0.36 | 0.40 | 0.44 | 0.48 | 0.51 | 0.55 | 0.59 | 0.63 | 0.66 | 0.70 | 0.74 | 0.78 | 0.81 | 0.78 | 0.81 | 0.93 | 0.96 | 1.00       |
| 5                              | $f_{sx,p} \quad f_{sy,p}$  | 0.28 | 0.32 | 0.36 | 0.40 | 0.44 | 0.48 | 0.52 | 0.56 | 0.60 | 0.64 | 0.68 | 0.72 | 0.76 | 0.80 | 0.76 | 0.80 | 0.92 | 0.96 | 1.00       |

<sup>1)</sup> Choose always the lowest value of the spacing  $s$ , when there are different spacings in one row

### d. Influence of edge distance

$$f_{cx,1,p} = 0.7 + 0.3 \frac{c_x}{c_{cr,p}} \leq 1 \quad f_{cx,2,p} = f_{cy,p} = \left( 1 + \frac{c_{x(y)}}{c_{cr,p}} \right) \cdot \frac{1}{2} \leq 1$$

Table 6: Influence of edge distance on combined pull-out and concrete cone resistance

| $c/c_{cr,p}$ | 0.10 | 0.15 | 0.20 | 0.25 | 0.30 | 0.35 | 0.40 | 0.45 | 0.50 | 0.55 | 0.60 | 0.65 | 0.70 | 0.75 | 0.70 | 0.75 | 0.90 | 0.95 | $\geq 1.0$ |
|--------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------------|
| $f_{cx,1,p}$ | 0.73 | 0.75 | 0.76 | 0.78 | 0.79 | 0.81 | 0.82 | 0.84 | 0.85 | 0.87 | 0.88 | 0.90 | 0.91 | 0.93 | 0.91 | 0.93 | 0.97 | 0.99 | 1.00       |
| $f_{cx,2,p}$ | 0.55 | 0.58 | 0.60 | 0.63 | 0.65 | 0.68 | 0.70 | 0.73 | 0.75 | 0.78 | 0.80 | 0.83 | 0.85 | 0.88 | 0.85 | 0.88 | 0.95 | 0.98 | 1.00       |
| $f_{sy,p}$   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |            |

## WIT-UH 300 WITH THREADED ROD (METRIC)

### e. Influence of sustained loads

$$\alpha_{\text{sus}} = \frac{N_{\text{sus},d}}{N_{\text{Ed}}}$$

$N_{\text{sus},d}$  = design value of sustained actions (permanent actions & permanent component of variable actions)

$N_{\text{Ed}}$  = Value of total actions in tension loading at ultimate limit state

Table 7: Influence of sustained loads on combined pull-out and concrete cone resistance

| $\alpha_{\text{sus}}$ | 10%  | 20%  | 30%  | 40%  | 50%  | 60%  | 70%  | 80%  | 90%  | 100% |
|-----------------------|------|------|------|------|------|------|------|------|------|------|
| $f_{\text{sus}}$      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.90 |

### 3. Design concrete cone resistance

$$N_{\text{Rd},c} = N_{\text{Rd},c}^0 \cdot f_{b,N} \cdot f_{sx} \cdot f_{sy} \cdot f_{cx,1} \cdot f_{cx,2} \cdot f_{cy}$$

No verification of splitting is required if at least one of the conditions is fulfilled:

- The edge distance in all directions is  $c \geq c_{\text{cr},\text{sp}}$  for single fasteners and  $c \geq 1.2 c_{\text{cr},\text{sp}}$  for fastener groups and the member depth is  $h \geq h_{\text{min}}$  in both cases.
- The characteristic resistance for concrete cone failure and pull-out failure is calculated for cracked concrete and reinforcement resists the splitting forces and limits the crack width to  $w_k \leq 0.3 \text{ mm}$

Table 8: Basic design resistance  $N_{\text{Rd},c}^0$  in case of concrete cone failure of a single anchor

| Thread size                 |                     |      | M8   | M10  | M12  | M16  | M20  | M24  | M27   | M30   |
|-----------------------------|---------------------|------|------|------|------|------|------|------|-------|-------|
| Effective anchorage depth   | $h_{\text{ef}}$     | [mm] | 80   | 90   | 110  | 125  | 170  | 210  | 240   | 270   |
| <b>Non-cracked concrete</b> |                     |      |      |      |      |      |      |      |       |       |
| Concrete cone resistance    | $N_{\text{Rd},c}^0$ | [kN] | 23.5 | 28.0 | 37.8 | 45.8 | 72.7 | 99.8 | 121.9 | 145.5 |
| <b>Cracked concrete</b>     |                     |      |      |      |      |      |      |      |       |       |
| Concrete cone resistance    | $N_{\text{Rd},c}^0$ | [kN] | 16.4 | 19.6 | 26.5 | 32.1 | 50.9 | 69.9 | 85.4  | 101.8 |

Table 9: Characteristic edge distance  $c_{\text{cr},N}$  and spacing  $s_{\text{cr},N}$

| Thread size               |                   |      | M8  | M10 | M12 | M16 | M20 | M24 | M27 | M30 |
|---------------------------|-------------------|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Effective anchorage depth | $h_{\text{ef}}$   | [mm] | 80  | 90  | 110 | 125 | 170 | 210 | 240 | 270 |
| Spacing                   | $s_{\text{cr},N}$ | [mm] | 240 | 270 | 330 | 375 | 510 | 630 | 720 | 810 |
| Edge distance             | $c_{\text{cr},N}$ | [mm] | 120 | 135 | 165 | 188 | 255 | 315 | 360 | 405 |

Above characteristic spacing and edge distances are given for the typical effective anchorage depths. Calculating for smaller depths leads to conservative load capacities. For calculation with bigger depths, use the following:

$$s_{\text{cr},N} = 3 h_{\text{ef}} \text{ and } c_{\text{cr},N} = 1.5 h_{\text{ef}}$$

## a. Influence of concrete strength

Table 10: Influence of concrete strength on concrete cone resistance

| Concrete strength classes<br>(EN 206:2000)                                                    |               |                      | C12/15 | C16/20 | C20/25 | C25/30 | C30/37 | C35/45 | C40/50 | C45/55 | C50/60 |
|-----------------------------------------------------------------------------------------------|---------------|----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Characteristic compressive strength of concrete determined by testing cylinders <sup>1)</sup> | $f_{ck}$      | [N/mm <sup>2</sup> ] | 12     | 16     | 20     | 25     | 30     | 35     | 40     | 45     | 50     |
| Characteristic compressive strength of concrete determined by testing cube <sup>2)</sup>      | $f_{ck,cube}$ | [N/mm <sup>2</sup> ] | 15     | 20     | 25     | 30     | 37     | 45     | 50     | 55     | 60     |
| Influencing factor                                                                            | $f_{b,N}$     | [-]                  | 0.77   | 0.89   | 1.00   | 1.12   | 1.24   | 1.32   | 1.41   | 1.50   | 1.58   |

<sup>1)</sup> strength at 28 days of 150 mm diameter by 300 mm cylinders

<sup>2)</sup> strength at 28 days of 150 mm cubes

## b. Influence of embedment depth

$$f_{hef} = \left( \frac{h_{ef}}{h_{ef,typ}} \right)^{1.5}$$

Consider the approved range of embedment  $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$  according to the table „anchor characteristics“.

## c. Influence of spacing

$$f_{sx} = f_{sy} = \left( 1 + (n_{x(y)} - 1) \frac{s_{x(y)}}{s_{cr,N}} \right) \cdot \frac{1}{n_{x(y)}} \leq 1$$

Table 11: Influence of spacing on concrete cone resistance

| Number of fixing per direction | $s/s_{cr,p}$ <sup>1)</sup> | 0.10 | 0.15 | 0.20 | 0.25 | 0.30 | 0.35 | 0.40 | 0.45 | 0.50 | 0.55 | 0.60 | 0.65 | 0.70 | 0.75 | 0.70 | 0.75 | 0.90 | 0.95 | ≥ 1.0 |
|--------------------------------|----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
| 2                              | $f_{sx'} f_{sy}$           | 0.55 | 0.58 | 0.60 | 0.63 | 0.65 | 0.68 | 0.70 | 0.73 | 0.75 | 0.78 | 0.80 | 0.83 | 0.85 | 0.88 | 0.85 | 0.88 | 0.95 | 0.98 | 1.00  |
| 3                              | $f_{sx'} f_{sy}$           | 0.40 | 0.43 | 0.47 | 0.50 | 0.53 | 0.57 | 0.60 | 0.63 | 0.67 | 0.70 | 0.73 | 0.77 | 0.80 | 0.83 | 0.80 | 0.83 | 0.93 | 0.97 | 1.00  |
| 4                              | $f_{sx'} f_{sy}$           | 0.33 | 0.36 | 0.40 | 0.44 | 0.48 | 0.51 | 0.55 | 0.59 | 0.63 | 0.66 | 0.70 | 0.74 | 0.78 | 0.81 | 0.78 | 0.81 | 0.93 | 0.96 | 1.00  |
| 5                              | $f_{sx'} f_{sy}$           | 0.28 | 0.32 | 0.36 | 0.40 | 0.44 | 0.48 | 0.52 | 0.56 | 0.60 | 0.64 | 0.68 | 0.72 | 0.76 | 0.80 | 0.76 | 0.80 | 0.92 | 0.96 | 1.00  |

<sup>1)</sup> Choose always the lowest value of the spacing  $s$ , when there are different spacings in one row

## d. Influence of edge distance

$$f_{cx,1} = 0.7 + 0.3 \frac{c_x}{c_{cr,N}} \leq 1 \quad f_{cx,2} = f_{cy} = \left( 1 + \frac{c_{x(y)}}{c_{cr,N}} \right) \cdot \frac{1}{2} \leq 1$$

Table 12: Influence of edge distance on concrete cone resistance

| $c/c_{cr,N}$ | 0.10 | 0.15 | 0.20 | 0.25 | 0.30 | 0.35 | 0.40 | 0.45 | 0.50 | 0.55 | 0.60 | 0.65 | 0.70 | 0.75 | 0.70 | 0.75 | 0.90 | 0.95 | ≥ 1.0 |
|--------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
| $f_{cx,1}$   | 0.73 | 0.75 | 0.76 | 0.78 | 0.79 | 0.81 | 0.82 | 0.84 | 0.85 | 0.87 | 0.88 | 0.90 | 0.91 | 0.93 | 0.91 | 0.93 | 0.97 | 0.99 | 1.00  |
| $f_{cx,2}$   | 0.55 | 0.58 | 0.60 | 0.63 | 0.65 | 0.68 | 0.70 | 0.73 | 0.75 | 0.78 | 0.80 | 0.83 | 0.85 | 0.88 | 0.85 | 0.88 | 0.95 | 0.98 | 1.00  |
| $f_{cy}$     |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |       |



# WIT-UH 300 WITH THREADED ROD (METRIC)

## 4. Design splitting resistance

$$N_{Rd,sp} = N_{Rd,sp}^0 \cdot f_{b,N} \cdot f_{hef} \cdot f_{sx,sp} \cdot f_{sy,sp} \cdot f_{cx,1,sp} \cdot f_{cx,2,sp} \cdot f_{cy,sp} \cdot f_h$$

Table 13: Design resistance  $N_{Rd,sp}^0$  in case of concrete splitting failure of a single anchor

| Thread size                 |               |      | M8   | M10  | M12  | M16  | M20  | M24  | M27   | M30   |
|-----------------------------|---------------|------|------|------|------|------|------|------|-------|-------|
| Effective anchorage depth   | $h_{ef}$      | [mm] | 80   | 90   | 110  | 125  | 170  | 210  | 240   | 270   |
| <b>Non-cracked concrete</b> |               |      |      |      |      |      |      |      |       |       |
| Concrete cone resistance    | $N_{Rd,sp}^0$ | [kN] | 22.8 | 28.0 | 37.8 | 45.8 | 72.7 | 99.8 | 121.9 | 145.5 |

Table 14: Characteristic edge distance  $c_{cr,sp}$  and spacing  $s_{cr,sp}$

| Thread size               |             |      | M8  | M10 | M12 | M16 | M20 | M24  | M27  | M30  |
|---------------------------|-------------|------|-----|-----|-----|-----|-----|------|------|------|
| Effective anchorage depth | $h_{ef}$    | [mm] | 80  | 90  | 110 | 125 | 170 | 210  | 240  | 270  |
| Spacing                   | $s_{cr,sp}$ | [mm] | 360 | 420 | 528 | 600 | 816 | 1008 | 1152 | 1296 |
| Edge distance             | $c_{cr,sp}$ | [mm] | 180 | 210 | 264 | 300 | 408 | 504  | 576  | 648  |
| Minimum member thickness  | $h_{min}$   | [mm] | 110 | 120 | 140 | 161 | 214 | 266  | 300  | 340  |

Above characteristic spacing and edge distances are given for the typical effective anchorage depth. Calculating for smaller depths leads to conservative load capacities. For calculation with bigger depths, use the following:

$$s_{cr,sp} = 2 \cdot c_{cr,sp} \quad \text{and} \quad c_{cr,sp} = \left\{ h_{ef} \leq 2 h_{ef} \cdot \left( 2.5 - \left( \frac{h_{min}}{h_{ef}} \right) \right) \leq 2.4 h_{ef} \right\}$$

and  $h_{min}$  according to the table „anchor characteristics“.

### a. Influence of concrete strength

Table 15: Influence of concrete strength on splitting resistance

| Concrete strength classes (EN 206:2000)                                                       |               |                      | C12/15 | C16/20 | C20/25 | C25/30 | C30/37 | C35/45 | C40/50 | C45/55 | C50/60 |
|-----------------------------------------------------------------------------------------------|---------------|----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Characteristic compressive strength of concrete determined by testing cylinders <sup>1)</sup> | $f_{ck}$      | [N/mm <sup>2</sup> ] | 12     | 16     | 20     | 25     | 30     | 35     | 40     | 45     | 50     |
| Characteristic compressive strength of concrete determined by testing cube <sup>2)</sup>      | $f_{ck,cube}$ | [N/mm <sup>2</sup> ] | 15     | 20     | 25     | 30     | 37     | 45     | 50     | 55     | 60     |
| Influencing factor                                                                            | $f_{b,N}$     | [-]                  | 0.77   | 0.89   | 1.00   | 1.12   | 1.22   | 1.32   | 1.41   | 1.50   | 1.58   |

<sup>1)</sup> strength at 28 days of 150 mm diameter by 300 mm cylinders

<sup>2)</sup> strength at 28 days of 150 mm cubes

### b. Influence of embedment depth

$$f_{hef} = \left( \frac{h_{ef}}{h_{ef,typ}} \right)^{1.5}$$

Consider the approved range of embedment  $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$  according to the table „anchor characteristics“.

### c. Influence of spacing

$$f_{sx,p} = f_{sy,p} = \left( 1 + (n_{x(y)} - 1) \frac{s_{x(y)}}{s_{cr,p}} \right) \cdot \frac{1}{n_{x(y)}} \leq 1$$

Table 16: Influence of spacing on splitting resistance

| Number of fixing per direction | $s/s_{cr,sp}^{1)}$     | 0.10 | 0.15 | 0.20 | 0.25 | 0.30 | 0.35 | 0.40 | 0.45 | 0.50 | 0.55 | 0.60 | 0.65 | 0.70 | 0.75 | 0.70 | 0.75 | 0.90 | 0.95 | $\geq 1$ |
|--------------------------------|------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----------|
| 2                              | $f_{sx,sp}, f_{sy,sp}$ | 0.55 | 0.58 | 0.60 | 0.63 | 0.65 | 0.68 | 0.70 | 0.73 | 0.75 | 0.78 | 0.80 | 0.83 | 0.85 | 0.88 | 0.85 | 0.88 | 0.95 | 0.98 | 1.00     |
| 3                              | $f_{sx,sp}, f_{sy,sp}$ | 0.40 | 0.43 | 0.47 | 0.50 | 0.53 | 0.57 | 0.60 | 0.63 | 0.67 | 0.70 | 0.73 | 0.77 | 0.80 | 0.83 | 0.80 | 0.83 | 0.93 | 0.97 | 1.00     |
| 4                              | $f_{sx,sp}, f_{sy,sp}$ | 0.33 | 0.36 | 0.40 | 0.44 | 0.48 | 0.51 | 0.55 | 0.59 | 0.63 | 0.66 | 0.70 | 0.74 | 0.78 | 0.81 | 0.78 | 0.81 | 0.93 | 0.96 | 1.00     |
| 5                              | $f_{sx,sp}, f_{sy,sp}$ | 0.28 | 0.32 | 0.36 | 0.40 | 0.44 | 0.48 | 0.52 | 0.56 | 0.60 | 0.64 | 0.68 | 0.72 | 0.76 | 0.80 | 0.76 | 0.80 | 0.92 | 0.96 | 1.00     |

<sup>1)</sup> Choose always the lowest value of the spacing  $s$ , when there are different spacings in one row

### d. Influence of edge distance

$$f_{cx,1,sp} = 0.7 + 0.3 \frac{c_x}{c_{cr,sp}} \leq 1 \quad f_{cx,2,sp} = f_{cy,sp} = \left( 1 + \frac{c_{x(y)}}{c_{cr,sp}} \right) \cdot \frac{1}{2} \leq 1$$

Table 17: Influence of edge distance on splitting resistance

| $c/c_{cr,sp}$ | 0.10 | 0.15 | 0.20 | 0.25 | 0.30 | 0.35 | 0.40 | 0.45 | 0.50 | 0.55 | 0.60 | 0.65 | 0.70 | 0.75 | 0.70 | 0.75 | 0.90 | 0.95 | $\geq 1$ |
|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----------|
| $f_{cx,1,sp}$ | 0.73 | 0.75 | 0.76 | 0.78 | 0.79 | 0.81 | 0.82 | 0.84 | 0.85 | 0.87 | 0.88 | 0.90 | 0.91 | 0.93 | 0.91 | 0.93 | 0.97 | 0.99 | 1.00     |
| $f_{cx,2,sp}$ | 0.55 | 0.58 | 0.60 | 0.63 | 0.65 | 0.68 | 0.70 | 0.73 | 0.75 | 0.78 | 0.80 | 0.83 | 0.85 | 0.88 | 0.85 | 0.88 | 0.95 | 0.98 | 1.00     |
| $f_{cy,sp}$   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |          |

### e. Influence of concrete member thickness

$$f_h = \left( \frac{h}{h_{min}} \right)^{2/3} \leq \max \left( 1; \left( \frac{h_{ef} + 1.5c_1}{h_{min}} \right)^{2/3} \right)$$

Table 18: Influence of concrete member thickness on splitting resistance

| $h/h_{min}$ | 1    | 1.1  | 1.2  | 1.3  | 1.4  | 1.5  | 1.6  | 1.7  | 1.8  | 1.9  | 2    | 2.1  | 2.2  | 2.3  | 2.4  | 2.3  | 2.4  | 2.7  | 2.8  | 2.9  |
|-------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| $f_h$       | 1.00 | 1.07 | 1.13 | 1.19 | 1.25 | 1.31 | 1.37 | 1.42 | 1.48 | 1.53 | 1.59 | 1.64 | 1.69 | 1.74 | 1.79 | 1.74 | 1.79 | 1.94 | 1.99 | 2.00 |

# WIT-UH 300 WITH THREADED ROD (METRIC)

## II. Shear loading

The decisive design resistance in shear is the lowest value of the following failure modes:

1. Steel failure  $V_{Rds}$
2. Concrete pry-out failure  $V_{Rd,c} = k \cdot \min \{N_{Rd,p}; N_{Rd,c}\}$
3. Concrete edge failure  $V_{Rd,c} = V_{Rd,c}^0 \cdot f_{b,V} \cdot f_{hef,V} \cdot f_{s,V} \cdot f_{c1,V} \cdot f_{c2,V} \cdot f_a \cdot f_h$

### 1. Design steel shear resistance

Table 19: Design value of steel resistance  $V_{Rd,s}$  of a single anchor

| Thread size               |     |            |      | M8   | M10  | M12  | M16  | M20  | M24   | M27   | M30   |
|---------------------------|-----|------------|------|------|------|------|------|------|-------|-------|-------|
| Effective anchorage depth |     | $h_{ef}$   | [mm] | 80   | 90   | 110  | 125  | 170  | 210   | 240   | 270   |
| Design steel resistance   | 5.8 | $V_{Rd,s}$ | [kN] | 8.8  | 13.9 | 20.2 | 37.7 | 58.8 | 84.7  | 110.2 | 134.6 |
|                           | 8.8 |            |      | 12.0 | 18.4 | 27.2 | 50.4 | 78.4 | 112.8 | 147.2 | 179.2 |
|                           | A4  |            |      | 8.3  | 12.8 | 19.2 | 35.3 | 55.1 | 79.5  | 48.3  | 58.8  |

### 2. Design concrete pry-out resistance

$$V_{Rd,c} = k_g \cdot \min \{N_{Rd,p}; N_{Rd,c}\}$$

Table 20: factor  $k_g$  for calculating design pry-out resistance

| Thread size                        |  |          |      | M8  | M10 | M12 | M16 | M20 | M24 | M27 | M30 |
|------------------------------------|--|----------|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Effective anchorage depth          |  | $h_{ef}$ | [mm] | 80  | 90  | 110 | 125 | 170 | 210 | 240 | 270 |
| Concrete pry-out resistance factor |  | $k_g$    | [-]  | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 |

### 3. Design concrete edge resistance

$$V_{Rd,c} = V_{Rd,c}^0 \cdot f_{b,V} \cdot f_{hef,V} \cdot f_{s,V} \cdot f_{c1,V} \cdot f_{c2,V} \cdot f_a \cdot f_h$$

Verification of concrete edge failure may be omitted for single fasteners and groups with an edge distance in all directions  $c \geq \max(10 h_{ef}; 60 d)$ . For anchorages with more than one edge, the resistance for all edges shall be calculated. The smallest value should be used in the verification.

Table 21: Design resistance  $V_{Rd,c}^0$  in case of concrete edge failure

| Thread size                  |  |              |      | M8  | M10 | M12 | M16 | M20 | M24  | M27  | M30  |
|------------------------------|--|--------------|------|-----|-----|-----|-----|-----|------|------|------|
| Effective anchorage depth    |  | $h_{ef}$     | [mm] | 80  | 90  | 110 | 125 | 170 | 210  | 240  | 270  |
| <b>Non-cracked concrete</b>  |  |              |      |     |     |     |     |     |      |      |      |
| Basic design edge resistance |  | $V_{Rd,c}^0$ | [kN] | 2.8 | 3.6 | 4.6 | 5.8 | 8.3 | 10.3 | 13.1 | 15.2 |
| <b>Cracked concrete</b>      |  |              |      |     |     |     |     |     |      |      |      |
| Basic design edge resistance |  | $V_{Rd,c}^0$ | [kN] | 2.0 | 2.5 | 3.2 | 4.1 | 5.9 | 7.3  | 9.3  | 10.7 |

## a. Influence of concrete strength

Table 22: Influence of concrete strength on concrete edge resistance

| Concrete strength classes<br>(EN 206:2000)                                                          |               |                      | C12/15 | C16/20 | C20/25 | C25/30 | C30/37 | C35/45 | C40/50 | C45/55 | C50/60 |
|-----------------------------------------------------------------------------------------------------|---------------|----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Characteristic compressive strength<br>of concrete determined by testing<br>cylinders <sup>1)</sup> | $f_{ck}$      | [N/mm <sup>2</sup> ] | 12     | 16     | 20     | 25     | 30     | 35     | 40     | 45     | 50     |
| Characteristic compressive strength of<br>concrete determined by testing cube <sup>2)</sup>         | $f_{ck,cube}$ | [N/mm <sup>2</sup> ] | 15     | 20     | 25     | 30     | 37     | 45     | 50     | 55     | 60     |
| Influencing factor                                                                                  | $f_{b,N}$     | [-]                  | 0.77   | 0.89   | 1.00   | 1.12   | 1.22   | 1.32   | 1.41   | 1.50   | 1.58   |

<sup>1)</sup> strength at 28 days of 150 mm diameter by 300 mm cylinders

<sup>2)</sup> strength at 28 days of 150 mm cubes

## b. Influence of embedment depth

Table 23: Influence of embedment depth on concrete edge resistance

| $h_{ef}/d$  | 4    | 5    | 6    | 7    | 8    | 9    | 10   | 11   | ≥ 12 |
|-------------|------|------|------|------|------|------|------|------|------|
| $f_{hel,V}$ | 0.87 | 0.91 | 0.94 | 0.97 | 1.00 | 1.02 | 1.05 | 1.07 | 1.08 |

<sup>1)</sup> Always choose the lowest value of the spacing  $s$ , when there are different spacing in the row closest to the edge.

## c. Influence of spacing

In groups loaded perpendicular to the edge only two adjacent anchors closest and parallel to the edge carry the load. The smallest spacing should be used for the verification.

$$f_{s,V} = \frac{1}{3} \cdot \frac{s}{c_1} + 1 \leq 2$$

Table 24: Influence of spacing on concrete edge resistance

| $s/c_1$ <sup>1)</sup> | 0.50 | 0.60 | 0.70 | 0.80 | 0.90 | 1.00 | 1.20 | 1.40 | 1.60 | 1.80 | 2.00 | 2.20 | 2.40 | 2.60 | 2.80 | 2.60 | 2.80 |
|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| $f_{s,V}$             | 1.17 | 1.20 | 1.23 | 1.27 | 1.30 | 1.33 | 1.40 | 1.47 | 1.53 | 1.60 | 1.67 | 1.73 | 1.80 | 1.87 | 1.93 | 1.87 | 1.93 |

<sup>1)</sup> Always choose the lowest value of the spacing  $s$ , when there are different spacing in the row closest to the edge.

## d. Influence of edge distance $c_1$

Table 25: Influence of edge distance  $c_1$  on concrete edge resistance

| $c_1/d$    | 4    | 8    | 12   | 15   | 20   | 30   | 40    | 50    | 60    | 100   | 150   | 200   |
|------------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|
| $f_{c1,V}$ | 0.47 | 1.19 | 2.05 | 2.76 | 4.05 | 6.95 | 10.22 | 13.76 | 17.54 | 34.66 | 59.52 | 87.35 |

# WIT-UH 300 WITH THREADED ROD (METRIC)

### e. Influence of edge distance $c_2$

$$f_{c2,v} = \left( \frac{1}{2} + \frac{1}{3} \frac{c_2}{c_1} \right) \left( 0.7 + 0.3 \frac{c_2}{1.5c_1} \right) \leq 1$$

Table 26: Influence of edge distance  $c_2$  on concrete edge resistance

| $c_2/c_1$ <sup>1)</sup> | 1    | 1.1  | 1.2  | 1.3  | 1.4  | 1.5  |
|-------------------------|------|------|------|------|------|------|
| $f_{c,v}$               | 0.75 | 0.80 | 0.85 | 0.90 | 0.95 | 1.00 |

<sup>1)</sup> Distance to the second edge:  $c_1 \leq c_2$


### f. Influence of load direction

$$f_\alpha = \frac{1}{\sqrt{\cos^2 \alpha_v + \left( \frac{\sin \alpha_v}{2} \right)^2}} \leq 2$$

Table 27: Influence of load direction on concrete edge resistance

| $\alpha$ <sup>1)</sup> | 0    | 10   | 20   | 30   | 40   | 50   | 60   | 70   | 80   | 90   |
|------------------------|------|------|------|------|------|------|------|------|------|------|
| $f_{\alpha,v}$         | 1.00 | 1.01 | 1.05 | 1.11 | 1.20 | 1.34 | 1.51 | 1.72 | 1.92 | 2.00 |

<sup>1)</sup> For  $\alpha \geq 90^\circ$  the component of the shear load acting away from the edge may be neglected and the verification may be done with parallel to the edge only.



### g. Influence of concrete member thickness

$$f_{h,v} = \left( \frac{h}{1.5c_1} \right)^{1/2}$$

Table 28: Influence of concrete member thickness on edge resistance

| $h/c_1$   | 0.1  | 0.2  | 0.3  | 0.4  | 0.5  | 0.6  | 0.7  | 0.8  | 0.9  | 1    | 1.1  | 1.2  | 1.3  | 1.4  | $\geq 1.50$ |
|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------------|
| $f_{h,v}$ | 0.26 | 0.37 | 0.45 | 0.52 | 0.58 | 0.63 | 0.68 | 0.73 | 0.77 | 0.82 | 0.86 | 0.89 | 0.93 | 0.97 | 1.00        |

**WIT-UH 300 M**

## Structural verification

$N_{Ed}$  = Design value of tension load acting on a fastener

$V_{Ed}$  = Design value of a shear load acting on a fastener

|   | Failure mode                            | Verification                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Steel failure of fastener <sup>1)</sup> | $\left(\frac{N_{Ed}}{N_{Rd}}\right)^2 + \left(\frac{V_{Ed}}{V_{Rd}}\right)^2 \leq 1$ <p>If <math>N_{Ed}</math> and <math>V_{Ed}</math> are different for the individual fasteners of the group, the interaction shall be verified for all fasteners.</p>                                                                                                                                                                                            |
| 2 | Failure modes other than steel failure  | $\left(\frac{N_{Ed}}{N_{Rd,i}}\right)^{1.5} + \left(\frac{V_{Ed}}{V_{Rd,i}}\right)^{1.5} \leq 1$ <p>or</p> $\left(\frac{N_{Ed}}{N_{Rd,i}}\right) + \left(\frac{V_{Ed}}{V_{Rd,i}}\right) \leq 1,2$ <p>With <math>N_{Ed} / N_{Rd,i} \leq 1</math> and <math>V_{Ed} / V_{Rd,i} \leq 1</math><br/>           The largest value of <math>N_{Ed} / N_{Rd,i}</math> and <math>V_{Ed} / V_{Rd,i}</math> for the different failure modes shall be taken.</p> |

<sup>1)</sup> This verification is not required in case of shear load with lever arm

## WIT-UH 300 WITH THREADED ROD (METRIC)

### Design bond strength

#### Service temperature for working life of 50 years

|                       | Base material temperature | Maximum long-term base material temperature | Maximum short-term base material temperature |
|-----------------------|---------------------------|---------------------------------------------|----------------------------------------------|
| Temperature range I   | - 40°C to +40°C           | +24°C                                       | +40°C                                        |
| Temperature range II  | - 40°C to +80°C           | +50°C                                       | +80°C                                        |
| Temperature range III | - 40°C to +120°C          | +72°C                                       | +120°C                                       |
| Temperature range IV  | - 40°C to +160°C          | +100°C                                      | +160°C                                       |

#### Service temperature for working life of 100 years

|                      | Base material temperature | Maximum long-term base material temperature | Maximum short-term base material temperature |
|----------------------|---------------------------|---------------------------------------------|----------------------------------------------|
| Temperature range I  | - 40°C to +40°C           | +24°C                                       | +40°C                                        |
| Temperature range II | - 40°C to +80°C           | +50°C                                       | +80°C                                        |

## Working life of 50 years

### 1- Non-cracked concrete

| Thread size                                                                                    |                      |                 |                      | M8   | M10  | M12  | M16  | M20                     | M24 | M27 | M30 |
|------------------------------------------------------------------------------------------------|----------------------|-----------------|----------------------|------|------|------|------|-------------------------|-----|-----|-----|
| Design bond resistance in non-cracked concrete C20/25 in case of manual air cleaning (MAC)     |                      |                 |                      |      |      |      |      |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 9.4  | 9.4  | 8.9  | 8.3  | No performance assessed |     |     |     |
| Temperature range II                                                                           |                      |                 |                      | 9.4  | 9.4  | 8.9  | 8.3  |                         |     |     |     |
| Temperature range III                                                                          |                      |                 |                      | 8.3  | 7.8  | 7.8  | 7.2  |                         |     |     |     |
| Temperature range IV                                                                           |                      |                 |                      | 6.7  | 6.1  | 6.1  | 5.6  |                         |     |     |     |
| Design bond resistance in non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                 |                      |      |      |      |      |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 11.3 | 11.3 | 10.7 | 10.0 | 9.3                     | 8.7 | 8.7 | 8.7 |
| Temperature range II                                                                           |                      |                 |                      | 11.3 | 11.3 | 10.7 | 10.0 | 9.3                     | 8.7 | 8.7 | 8.7 |
| Temperature range III                                                                          |                      |                 |                      | 10.0 | 9.3  | 9.3  | 8.7  | 8.0                     | 8.0 | 7.3 | 7.3 |
| Temperature range IV                                                                           |                      |                 |                      | 8.0  | 7.3  | 7.3  | 6.7  | 6.3                     | 6.0 | 6.0 | 6.0 |
| Design bond resistance in non-cracked concrete C20/25 in case of hollow drill bit system (HDB) |                      |                 |                      |      |      |      |      |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 9.4  | 9.4  | 8.9  | 8.3  | 7.8                     | 7.2 | 7.2 | 7.2 |
| Temperature range II                                                                           |                      |                 |                      | 9.4  | 9.4  | 8.9  | 8.3  | 7.8                     | 7.2 | 7.2 | 7.2 |
| Temperature range III                                                                          |                      |                 |                      | 8.3  | 7.8  | 7.8  | 7.2  | 6.7                     | 6.7 | 6.1 | 6.1 |
| Temperature range IV                                                                           |                      |                 |                      | 6.7  | 6.1  | 6.1  | 5.6  | 5.3                     | 5.0 | 5.0 | 5.0 |
| Design bond resistance in non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                 |                      |      |      |      |      |                         |     |     |     |
| Temperature range I                                                                            | Flooded bore hole    | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 8.1  | 8.1  | 7.6  | 7.1  | 6.7                     | 6.2 | 6.2 | 6.2 |
| Temperature range II                                                                           |                      |                 |                      | 8.1  | 8.1  | 7.6  | 7.1  | 6.7                     | 6.2 | 6.2 | 6.2 |
| Temperature range III                                                                          |                      |                 |                      | 7.1  | 6.7  | 6.7  | 6.2  | 5.7                     | 5.7 | 5.2 | 5.2 |
| Temperature range IV                                                                           |                      |                 |                      | 5.7  | 5.2  | 5.2  | 4.8  | 4.5                     | 4.3 | 4.3 | 4.3 |



## WIT-UH 300 WITH THREADED ROD (METRIC)

### 2- Cracked concrete

| Thread size                                                                                    |                      |                 |                      | M8  | M10 | M12 | M16 | M20                     | M24 | M27 | M30 |
|------------------------------------------------------------------------------------------------|----------------------|-----------------|----------------------|-----|-----|-----|-----|-------------------------|-----|-----|-----|
| Design bond resistance in non-cracked concrete C20/25 in case of manual air cleaning (MAC)     |                      |                 |                      |     |     |     |     |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 3.9 | 4.2 | 4.4 | 5.0 | No performance assessed |     |     |     |
| Temperature range II                                                                           |                      |                 |                      | 3.9 | 4.2 | 4.4 | 5.0 |                         |     |     |     |
| Temperature range III                                                                          |                      |                 |                      | 3.3 | 3.6 | 3.9 | 4.2 |                         |     |     |     |
| Temperature range IV                                                                           |                      |                 |                      | 3.1 | 3.1 | 3.3 | 3.6 |                         |     |     |     |
| Design bond resistance in non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                 |                      |     |     |     |     |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 4.7 | 5.0 | 5.3 | 6.0 | 5.7                     | 4.7 | 4.7 | 4.7 |
| Temperature range II                                                                           |                      |                 |                      | 4.7 | 5.0 | 5.3 | 6.0 | 5.7                     | 4.7 | 4.7 | 4.7 |
| Temperature range III                                                                          |                      |                 |                      | 4.0 | 4.3 | 4.7 | 5.0 | 4.7                     | 4.0 | 4.0 | 4.0 |
| Temperature range IV                                                                           |                      |                 |                      | 3.7 | 3.7 | 4.0 | 4.3 | 4.0                     | 3.7 | 3.7 | 3.7 |
| Design bond resistance in non-cracked concrete C20/25 in case of hollow drill bit system (HDB) |                      |                 |                      |     |     |     |     |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 3.9 | 4.2 | 4.4 | 5.0 | 4.7                     | 3.9 | 3.9 | 3.9 |
| Temperature range II                                                                           |                      |                 |                      | 3.9 | 4.2 | 4.4 | 5.0 | 4.7                     | 3.9 | 3.9 | 3.9 |
| Temperature range III                                                                          |                      |                 |                      | 3.3 | 3.6 | 3.9 | 4.2 | 3.9                     | 3.3 | 3.3 | 3.3 |
| Temperature range IV                                                                           |                      |                 |                      | 3.1 | 3.1 | 3.3 | 3.6 | 3.3                     | 3.1 | 3.1 | 3.1 |
| Design bond resistance in non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                 |                      |     |     |     |     |                         |     |     |     |
| Temperature range I                                                                            | Flooded bore hole    | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 3.3 | 3.6 | 3.8 | 4.3 | 4.0                     | 3.3 | 3.3 | 3.3 |
| Temperature range II                                                                           |                      |                 |                      | 3.3 | 3.6 | 3.8 | 4.3 | 4.0                     | 3.3 | 3.3 | 3.3 |
| Temperature range III                                                                          |                      |                 |                      | 2.9 | 3.1 | 3.3 | 3.6 | 3.3                     | 2.9 | 2.9 | 2.9 |
| Temperature range IV                                                                           |                      |                 |                      | 2.6 | 2.6 | 2.9 | 3.1 | 2.9                     | 2.6 | 2.6 | 2.6 |

## Working life of 100 years

### 1- Non-cracked concrete

| Thread size                                                                                    |                      |                    |                      | M8   | M10  | M12  | M16  | M20                     | M24 | M27 | M30 |
|------------------------------------------------------------------------------------------------|----------------------|--------------------|----------------------|------|------|------|------|-------------------------|-----|-----|-----|
| Design bond resistance in non-cracked concrete C20/25 in case of manual air cleaning (MAC)     |                      |                    |                      |      |      |      |      |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 9.4  | 9.4  | 8.9  | 8.3  | No performance assessed |     |     |     |
| Temperature range II                                                                           |                      |                    |                      | 9.4  | 9.4  | 8.9  | 8.3  |                         |     |     |     |
| Design bond resistance in non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                    |                      |      |      |      |      |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 11.3 | 11.3 | 10.7 | 10.0 | 9.3                     | 8.7 | 8.7 | 8.7 |
| Temperature range II                                                                           |                      |                    |                      | 11.3 | 11.3 | 10.7 | 10.0 | 9.3                     | 8.7 | 8.7 | 8.7 |
| Design bond resistance in non-cracked concrete C20/25 in case of hollow drill bit system (HDB) |                      |                    |                      |      |      |      |      |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 9.4  | 9.4  | 8.9  | 8.3  | 7.8                     | 7.2 | 7.2 | 7.2 |
| Temperature range II                                                                           |                      |                    |                      | 9.4  | 9.4  | 8.9  | 8.3  | 7.8                     | 7.2 | 7.2 | 7.2 |
| Design bond resistance in non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                    |                      |      |      |      |      |                         |     |     |     |
| Temperature range I                                                                            | Flooded bore hole    | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 8.1  | 8.1  | 7.6  | 7.1  | 6.7                     | 6.2 | 6.2 | 6.2 |
| Temperature range II                                                                           |                      |                    |                      | 8.1  | 8.1  | 7.6  | 7.1  | 6.7                     | 6.2 | 6.2 | 6.2 |

### 2- Cracked concrete

| Thread size                                                                                    |                      |                    |                      | M8  | M10 | M12 | M16 | M20                     | M24 | M27 | M30 |
|------------------------------------------------------------------------------------------------|----------------------|--------------------|----------------------|-----|-----|-----|-----|-------------------------|-----|-----|-----|
| Design bond resistance in non-cracked concrete C20/25 in case of manual air cleaning (MAC)     |                      |                    |                      |     |     |     |     |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 3.1 | 3.3 | 3.6 | 3.6 | No performance assessed |     |     |     |
| Temperature range II                                                                           |                      |                    |                      | 3.1 | 3.3 | 3.6 | 3.6 |                         |     |     |     |
| Design bond resistance in non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                    |                      |     |     |     |     |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 3.7 | 4.0 | 4.3 | 4.3 | 4.3                     | 4.3 | 4.3 | 4.3 |
| Temperature range II                                                                           |                      |                    |                      | 3.7 | 4.0 | 4.3 | 4.3 | 4.3                     | 4.3 | 4.3 | 4.3 |
| Design bond resistance in non-cracked concrete C20/25 in case of hollow drill bit system (HDB) |                      |                    |                      |     |     |     |     |                         |     |     |     |
| Temperature range I                                                                            | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 3.1 | 3.3 | 3.6 | 3.6 | 3.6                     | 3.6 | 3.6 | 3.6 |
| Temperature range II                                                                           |                      |                    |                      | 3.1 | 3.3 | 3.6 | 3.6 | 3.6                     | 3.6 | 3.6 | 3.6 |
| Design bond resistance in non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                    |                      |     |     |     |     |                         |     |     |     |
| Temperature range I                                                                            | Flooded bore hole    | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 2.6 | 2.9 | 3.1 | 3.1 | 3.1                     | 3.1 | 3.1 | 3.1 |
| Temperature range II                                                                           |                      |                    |                      | 2.6 | 2.9 | 3.1 | 3.1 | 3.1                     | 3.1 | 3.1 | 3.1 |

# WIT-UH 300 WITH THREADED ROD (METRIC)

## Reduction factors

Working life of 50 years

### 1- Non-cracked concrete

| Thread size                                                                               |                      |                 |                      | M8   | M10  | M12  | M16  | M20                     | M24  | M27  | M30  |
|-------------------------------------------------------------------------------------------|----------------------|-----------------|----------------------|------|------|------|------|-------------------------|------|------|------|
| Reduction factor for non-cracked concrete C20/25 in case of manual air cleaning (MAC)     |                      |                 |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | No performance assessed |      |      |      |
| Temperature range II                                                                      |                      |                 |                      | 1.00 | 1.00 | 1.00 | 1.00 |                         |      |      |      |
| Temperature range III                                                                     |                      |                 |                      | 0.88 | 0.82 | 0.88 | 0.87 |                         |      |      |      |
| Temperature range IV                                                                      |                      |                 |                      | 0.71 | 0.65 | 0.69 | 0.67 |                         |      |      |      |
| Reduction factor for non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                 |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                 |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range III                                                                     |                      |                 |                      | 0.88 | 0.82 | 0.88 | 0.87 | 0.86                    | 0.92 | 0.85 | 0.85 |
| Temperature range IV                                                                      |                      |                 |                      | 0.71 | 0.65 | 0.69 | 0.67 | 0.68                    | 0.69 | 0.69 | 0.69 |
| Reduction factor for non-cracked concrete C20/25 in case of hollow drill bit system (HDB) |                      |                 |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                 |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range III                                                                     |                      |                 |                      | 0.88 | 0.82 | 0.88 | 0.87 | 0.86                    | 0.92 | 0.85 | 0.85 |
| Temperature range IV                                                                      |                      |                 |                      | 0.71 | 0.65 | 0.69 | 0.67 | 0.68                    | 0.69 | 0.69 | 0.69 |
| Reduction factor for non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                 |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Flooded bore hole    | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                 |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range III                                                                     |                      |                 |                      | 0.88 | 0.82 | 0.88 | 0.87 | 0.86                    | 0.92 | 0.85 | 0.85 |
| Temperature range IV                                                                      |                      |                 |                      | 0.71 | 0.65 | 0.69 | 0.67 | 0.68                    | 0.69 | 0.69 | 0.69 |

## 2- Cracked concrete

| Thread size                                                                               |                      |                 |                      | M8   | M10  | M12  | M16  | M20                     | M24  | M27  | M30  |
|-------------------------------------------------------------------------------------------|----------------------|-----------------|----------------------|------|------|------|------|-------------------------|------|------|------|
| Reduction factor for non-cracked concrete C20/25 in case of manual air cleaning (MAC)     |                      |                 |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | No performance assessed |      |      |      |
| Temperature range II                                                                      |                      |                 |                      | 1.00 | 1.00 | 1.00 | 1.00 |                         |      |      |      |
| Temperature range III                                                                     |                      |                 |                      | 0.86 | 0.87 | 0.88 | 0.83 |                         |      |      |      |
| Temperature range IV                                                                      |                      |                 |                      | 0.79 | 0.73 | 0.75 | 0.72 |                         |      |      |      |
| Reduction factor for non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                 |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                 |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range III                                                                     |                      |                 |                      | 0.86 | 0.87 | 0.88 | 0.83 | 0.82                    | 0.86 | 0.86 | 0.86 |
| Temperature range IV                                                                      |                      |                 |                      | 0.79 | 0.73 | 0.75 | 0.72 | 0.71                    | 0.79 | 0.79 | 0.79 |
| Reduction factor for non-cracked concrete C20/25 in case of hollow drill bit system (HDB) |                      |                 |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                 |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 |      |
| Temperature range III                                                                     |                      |                 |                      | 0.86 | 0.87 | 0.88 | 0.83 | 0.82                    | 0.86 | 0.86 | 0.86 |
| Temperature range IV                                                                      |                      |                 |                      | 0.79 | 0.73 | 0.75 | 0.72 | 0.71                    | 0.79 | 0.79 | 0.79 |
| Reduction factor for non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                 |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Flooded bore hole    | $\tau_{Rd,ucr}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                 |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 |      |
| Temperature range III                                                                     |                      |                 |                      | 0.86 | 0.87 | 0.88 | 0.83 | 0.82                    | 0.86 | 0.86 | 0.86 |
| Temperature range IV                                                                      |                      |                 |                      | 0.79 | 0.73 | 0.75 | 0.72 | 0.71                    | 0.79 | 0.79 | 0.79 |

# WIT-UH 300 WITH THREADED ROD (METRIC)

Working life of 100 years

## 1- Non-cracked concrete

| Thread size                                                                               |                      |                    |                      | M8   | M10  | M12  | M16  | M20                     | M24  | M27  | M30  |
|-------------------------------------------------------------------------------------------|----------------------|--------------------|----------------------|------|------|------|------|-------------------------|------|------|------|
| Reduction factor for non-cracked concrete C20/25 in case of manual air cleaning (MAC)     |                      |                    |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | No performance assessed |      |      |      |
| Temperature range II                                                                      |                      |                    |                      | 1.00 | 1.00 | 1.00 | 1.00 |                         |      |      |      |
| Reduction factor for non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                    |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                    |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Reduction factor for non-cracked concrete C20/25 in case of hollow drill bit system (HDB) |                      |                    |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                    |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Reduction factor for non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                    |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Flooded bore hole    | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                    |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |

## 2- Cracked concrete

| Thread size                                                                               |                      |                    |                      | M8   | M10  | M12  | M16  | M20                     | M24  | M27  | M30  |
|-------------------------------------------------------------------------------------------|----------------------|--------------------|----------------------|------|------|------|------|-------------------------|------|------|------|
| Reduction factor for non-cracked concrete C20/25 in case of manual air cleaning (MAC)     |                      |                    |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | No performance assessed |      |      |      |
| Temperature range II                                                                      |                      |                    |                      | 1.00 | 1.00 | 1.00 | 1.00 |                         |      |      |      |
| Reduction factor for non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                    |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                    |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Reduction factor for non-cracked concrete C20/25 in case of hollow drill bit system (HDB) |                      |                    |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Dry and wet concrete | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                    |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Reduction factor for non-cracked concrete C20/25 in case of compressed air cleaning (CAC) |                      |                    |                      |      |      |      |      |                         |      |      |      |
| Temperature range I                                                                       | Flooded bore hole    | $\tau_{Rd,ucr100}$ | [N/mm <sup>2</sup> ] | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |
| Temperature range II                                                                      |                      |                    |                      | 1.00 | 1.00 | 1.00 | 1.00 | 1.00                    | 1.00 | 1.00 | 1.00 |

### Mechanical characteristics

| Steel grade | Thread size            |              |                      | M8   | M10  | M12  | M16   | M20   | M24   | M27    | M30    |
|-------------|------------------------|--------------|----------------------|------|------|------|-------|-------|-------|--------|--------|
|             | Stressed cross section | $A_s$        | [mm <sup>2</sup> ]   | 37   | 58   | 84   | 157   | 245   | 352   | 459    | 561    |
|             | Section modulus        | $W$          | [mm <sup>3</sup> ]   | 31   | 62   | 109  | 277   | 541   | 935   | 1387   | 1874   |
| 4.6         | Yield strength         | $f_y$        | [N/mm <sup>2</sup> ] | 240  | 240  | 240  | 240   | 240   | 240   | 240    | 240    |
|             | Tensile strength       | $f_u$        | [N/mm <sup>2</sup> ] | 400  | 400  | 400  | 400   | 400   | 400   | 400    | 400    |
|             | Design bending moment  | $M_{Rd,s}^0$ | [Nm]                 | 9.0  | 18.0 | 31.1 | 79.6  | 155.7 | 268.9 | 398.8  | 538.9  |
| 4.8         | Yield strength         | $f_y$        | [N/mm <sup>2</sup> ] | 320  | 320  | 320  | 320   | 320   | 320   | 320    | 320    |
|             | Tensile strength       | $f_u$        | [N/mm <sup>2</sup> ] | 400  | 400  | 400  | 400   | 400   | 400   | 400    | 400    |
|             | Design bending moment  | $M_{Rd,s}^0$ | [Nm]                 | 12.0 | 24.0 | 41.6 | 106.4 | 208.0 | 359.2 | 532.8  | 720.0  |
| 5.6         | Yield strength         | $f_y$        | [N/mm <sup>2</sup> ] | 300  | 300  | 300  | 300   | 300   | 300   | 300    | 300    |
|             | Tensile strength       | $f_u$        | [N/mm <sup>2</sup> ] | 500  | 500  | 500  | 500   | 500   | 500   | 500    | 500    |
|             | Design bending moment  | $M_{Rd,s}^0$ | [Nm]                 | 11.4 | 22.2 | 38.9 | 99.4  | 194.0 | 335.3 | 498.8  | 672.5  |
| 5.8         | Yield strength         | $f_y$        | [N/mm <sup>2</sup> ] | 400  | 400  | 400  | 400   | 400   | 400   | 400    | 400    |
|             | Tensile strength       | $f_u$        | [N/mm <sup>2</sup> ] | 500  | 500  | 500  | 500   | 500   | 500   | 500    | 500    |
|             | Design bending moment  | $M_{Rd,s}^0$ | [Nm]                 | 15.2 | 29.6 | 52   | 132.8 | 259.2 | 448   | 666.4  | 898.4  |
| 8.8         | Yield strength         | $f_y$        | [N/mm <sup>2</sup> ] | 640  | 640  | 640  | 640   | 640   | 640   | 640    | 640    |
|             | Tensile strength       | $f_u$        | [N/mm <sup>2</sup> ] | 800  | 800  | 800  | 800   | 800   | 800   | 800    | 800    |
|             | Design bending moment  | $M_{Rd,s}^0$ | [Nm]                 | 24.0 | 48.0 | 84.0 | 212.8 | 415.2 | 716.8 | 1066.4 | 1437.6 |
| A4-50       | Yield strength         | $f_y$        | [N/mm <sup>2</sup> ] | 210  | 210  | 210  | 210   | 210   | 210   | 210    | 210    |
|             | Tensile strength       | $f_u$        | [N/mm <sup>2</sup> ] | 500  | 500  | 500  | 500   | 500   | 500   | 500    | 500    |
|             | Design bending moment  | $M_{Rd,s}^0$ | [Nm]                 | 8.0  | 15.5 | 27.7 | 70.2  | 136.6 | 235.7 | 349.6  | 472.7  |
| A4-70       | Yield strength         | $f_y$        | [N/mm <sup>2</sup> ] | 450  | 450  | 450  | 450   | 450   | 450   | -      | -      |
|             | Tensile strength       | $f_u$        | [N/mm <sup>2</sup> ] | 700  | 700  | 700  | 700   | 700   | 700   | -      | -      |
|             | Design bending moment  | $M_{Rd,s}^0$ | [Nm]                 | 16.7 | 33.3 | 59.0 | 148.7 | 291.0 | 502.6 | -      | -      |

## WIT-UH 300 WITH THREADED ROD (METRIC)

### Material specifications

| Part                                                                                              | Designation                  | Material                                                                                                                                  |     |                                 |                               |                        |
|---------------------------------------------------------------------------------------------------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----|---------------------------------|-------------------------------|------------------------|
| <b>Steel, zinc plated</b> (Steel acc. to EN 10087:1998 or EN 10263:2001)                          |                              |                                                                                                                                           |     |                                 |                               |                        |
| - zinc plated $\geq 5 \mu\text{m}$ acc. to EN ISO 4042:1999                                       |                              |                                                                                                                                           |     |                                 |                               |                        |
| - hot-dip galvanized $\geq 40 \mu\text{m}$ acc. to EN ISO 1461:2009 and EN ISO 10684:2004+AC:2009 |                              |                                                                                                                                           |     |                                 |                               |                        |
| - sherardized $\geq 45 \mu\text{m}$ acc. to EN ISO 17668:2016                                     |                              |                                                                                                                                           |     |                                 |                               |                        |
| 1                                                                                                 | Anchor rod                   | Property class                                                                                                                            |     | Characteristic tensile strength | Characteristic yield strength | Elongation at fracture |
|                                                                                                   |                              | acc. to EN ISO 898-1:2013                                                                                                                 | 4.6 | $f_{uk} = 400 \text{ N/mm}^2$   | $f_{yk} = 240 \text{ N/mm}^2$ | A5 > 8%                |
|                                                                                                   |                              |                                                                                                                                           | 4.8 | $f_{uk} = 400 \text{ N/mm}^2$   | $f_{yk} = 320 \text{ N/mm}^2$ | A5 > 8%                |
|                                                                                                   |                              |                                                                                                                                           | 5.6 | $f_{uk} = 500 \text{ N/mm}^2$   | $f_{yk} = 300 \text{ N/mm}^2$ | A5 > 8%                |
|                                                                                                   |                              |                                                                                                                                           | 5.8 | $f_{uk} = 500 \text{ N/mm}^2$   | $f_{yk} = 400 \text{ N/mm}^2$ | A5 > 8%                |
|                                                                                                   |                              |                                                                                                                                           | 8.8 | $f_{uk} = 800 \text{ N/mm}^2$   | $f_{yk} = 640 \text{ N/mm}^2$ | A5 > 12% <sup>3)</sup> |
| 2                                                                                                 | Hexagon nut                  | acc. to EN ISO 898-2:2012                                                                                                                 | 4   | for anchor rod class 4.6 or 4.8 |                               |                        |
|                                                                                                   |                              |                                                                                                                                           | 5   | for anchor rod class 5.6 or 5.8 |                               |                        |
|                                                                                                   |                              |                                                                                                                                           | 8   | for anchor rod class 8.8        |                               |                        |
| 3a                                                                                                | Washer                       | Steel, zinc plated, hot-dip galvanized or sherardized<br>(e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000, or EN ISO 7094:2000) |     |                                 |                               |                        |
| 3b                                                                                                | Filling Washer               | Steel, zinc plated, hot-dip galvanized or sherardized                                                                                     |     |                                 |                               |                        |
| 4                                                                                                 | Internal threaded anchor rod | Property class                                                                                                                            |     | Characteristic tensile strength | Characteristic yield strength | Elongation at fracture |
|                                                                                                   |                              | acc. to EN ISO 898-1:2013                                                                                                                 | 5.8 | $f_{uk} = 500 \text{ N/mm}^2$   | $f_{yk} = 400 \text{ N/mm}^2$ | A5 > 8%                |
|                                                                                                   |                              |                                                                                                                                           | 8.8 | $f_{uk} = 800 \text{ N/mm}^2$   | $f_{yk} = 640 \text{ N/mm}^2$ | A5 > 8%                |

| Part                                                                                                      | Designation                                   | Material                                                                                                                                                                                                                                                                                                                                               |    |                                 |                               |                        |
|-----------------------------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|---------------------------------|-------------------------------|------------------------|
| <b>Stainless steel A2</b> (Material 1.4301 / 1.4303 / 1.4307 / 1.4567 or 1.4541, acc. to EN 1088-1:2014)  |                                               |                                                                                                                                                                                                                                                                                                                                                        |    |                                 |                               |                        |
| <b>Stainless steel A4</b> (Material 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014) |                                               |                                                                                                                                                                                                                                                                                                                                                        |    |                                 |                               |                        |
| <b>High corrosion resistance steel</b> (Material 1.4529 or 1.4565, acc. to EN 10088-1:2014)               |                                               |                                                                                                                                                                                                                                                                                                                                                        |    |                                 |                               |                        |
| 1                                                                                                         | Anchor rod <sup>1) 4)</sup>                   | Property class                                                                                                                                                                                                                                                                                                                                         |    | Characteristic tensile strength | Characteristic yield strength | Elongation at fracture |
|                                                                                                           |                                               | acc. to EN ISO 3506-1:2009                                                                                                                                                                                                                                                                                                                             | 50 | $f_{uk} = 400 \text{ N/mm}^2$   | $f_{yk} = 240 \text{ N/mm}^2$ | A5 > 12% <sup>3)</sup> |
|                                                                                                           |                                               |                                                                                                                                                                                                                                                                                                                                                        | 70 | $f_{uk} = 400 \text{ N/mm}^2$   | $f_{yk} = 320 \text{ N/mm}^2$ | A5 > 12% <sup>3)</sup> |
|                                                                                                           |                                               |                                                                                                                                                                                                                                                                                                                                                        | 80 | $f_{uk} = 500 \text{ N/mm}^2$   | $f_{yk} = 300 \text{ N/mm}^2$ | A5 > 12% <sup>3)</sup> |
| 2                                                                                                         | Hexagon nut <sup>1) 4)</sup>                  | acc. to EN ISO 3506-1:2009                                                                                                                                                                                                                                                                                                                             | 50 | for anchor rod class 50         |                               |                        |
|                                                                                                           |                                               |                                                                                                                                                                                                                                                                                                                                                        | 70 | for anchor rod class 70         |                               |                        |
|                                                                                                           |                                               |                                                                                                                                                                                                                                                                                                                                                        | 80 | for anchor rod class 80         |                               |                        |
| 3a                                                                                                        | Washer                                        | Stainless steel A2 (Material 1.4301 / 1.4303 / 1.4307 / 1.4567 or 1.4541, acc. to EN 1088-1:2014)<br>Stainless steel A4 (Material 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014)<br>HCR: Material 1.4529 or 1.4565, acc. to EN 10088-1:2014<br>(e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000, or EN ISO 7094:2000) |    |                                 |                               |                        |
| 3b                                                                                                        | Filling Washer                                | Stainless steel A4, High corrosion resistance steel                                                                                                                                                                                                                                                                                                    |    |                                 |                               |                        |
| 4                                                                                                         | Internal threaded anchor rod <sup>1) 2)</sup> | Property class                                                                                                                                                                                                                                                                                                                                         |    | Characteristic tensile strength | Characteristic yield strength | Elongation at fracture |
|                                                                                                           |                                               | acc. to EN ISO 3506-1:2009                                                                                                                                                                                                                                                                                                                             | 50 | $f_{uk} = 500 \text{ N/mm}^2$   | $f_{yk} = 210 \text{ N/mm}^2$ | A5 > 8%                |
|                                                                                                           |                                               |                                                                                                                                                                                                                                                                                                                                                        | 70 | $f_{uk} = 700 \text{ N/mm}^2$   | $f_{yk} = 450 \text{ N/mm}^2$ | A5 > 8%                |

<sup>1)</sup> Property class 70 for anchor rods up to M24 and Internal threaded anchor rods up to IG-M16

<sup>2)</sup> for IG-M20 only property class 50

<sup>3)</sup> A<sub>5</sub> > 8% fracture elongation if no requirement for performance category C2 exists

<sup>4)</sup> Property class 80 only for stainless steel A4



## WIT-UH 300 WITH THREADED ROD (METRIC)

### Chemical resistance

| Chemical Agent              | Concentration | Resistant | Not Resistant |
|-----------------------------|---------------|-----------|---------------|
| Air                         |               | ●         |               |
| Acetic acid                 | 10            | ●         |               |
| Ammonia, aqueous solution   | 5             | ●         |               |
| Chlorinated lime            | 10            | ●         |               |
| Citric acid                 | 10            | ●         |               |
| Deminerlized Water          | 100           | ●         |               |
| Diesel Fuel                 | 100           | ●         |               |
| Ethanol                     | 100           |           | ●             |
| Ethyl Acetate               | 100           |           | ●             |
| Fuel Oil                    | 100           | ●         |               |
| Gasoline                    | 100           | ●         |               |
| Hydraulic fluid             | 100           | ●         |               |
| Isopropyl alcohol           | 100           |           | ●             |
| Lactic acid                 | 10            | ●         |               |
| Linseed oil                 | 100           | ●         |               |
| Lubricating oil             | 100           | ●         |               |
| Methanol                    | 100           |           | ●             |
| Phosphoric acid             | 10            | ●         |               |
| Potassium Hydroxide pH 13.2 | 100           | ●         |               |
| Salt (Calcium Chloride)     | 100           | ●         |               |
| Sea water                   | 100           | ●         |               |
| Sodium Carbonate            | 10            | ●         |               |
| Sulfuric acid               | 10            | ●         |               |

## Properties of adhesive

| Property                    |                           | Testing method   | Result/Mean Value                      |
|-----------------------------|---------------------------|------------------|----------------------------------------|
| <b>Stability</b>            |                           |                  |                                        |
| UV-resistance (sunlight)    |                           |                  | Resistant                              |
| Temperature stability       |                           |                  | ≤ 160 °C                               |
| <b>Physical properties</b>  |                           |                  |                                        |
| Flexural properties         | Flexural strength         | DIN EN 196-1     | after 24 hours: 22.2 N/mm <sup>2</sup> |
| Compressive properties      | Compressive strength      |                  | after 24 hours: 126 N/mm <sup>2</sup>  |
| Tensile properties          | Tensile strength          | DIN EN ISO 527-2 | 14.9 N/mm <sup>2</sup>                 |
|                             | Coefficient of elasticity |                  | 8300 N/mm <sup>2</sup>                 |
|                             | Mean strain at fracture   |                  | 2.6%                                   |
| Shrinkage                   |                           | DIN 52450        | < 1.8 ‰                                |
| Shore-hardness A            |                           | DIN EN ISO 868   | 97.6                                   |
| Density                     |                           | Weighing         | 1.78 kg/dm <sup>3</sup>                |
| Thermal conductivity        |                           | DIN EN 993-15    | 1.06 W/mK                              |
| Specific heat capacity      |                           |                  | 1.09 J/Kg K                            |
| Electrical resistance       |                           | DIN IEC 93       | 7.2 · 10 <sup>13</sup> Ω               |
| <b>Workability features</b> |                           |                  |                                        |
| Working time (20 °C)        |                           |                  | 3 min                                  |
| Curing time (20 °C)         |                           |                  | 30 mins                                |
| Shelf-life                  |                           |                  | 18 months                              |

For information use only. Values are not to be considered as a specification and do not reflect the performance of the system. The given values are typical values and are subject to change without notice.

## Working and curing times

| Temperature of base material | Gelling - working time | Min. curing time - dry conditions <sup>1)</sup> |
|------------------------------|------------------------|-------------------------------------------------|
| -5 °C to -1 °C               | 50 min                 | 5 h                                             |
| 0 °C to 4 °C                 | 25 min                 | 3.5 h                                           |
| 5 °C to 9 °C                 | 15 min                 | 2 h                                             |
| 10 °C to 14 °C               | 10 min                 | 60 min                                          |
| 15 °C to 19 °C               | 6 min                  | 40 min                                          |
| 20 °C to 29 °C               | 3 min                  | 30 min                                          |
| 30 °C to 40 °C               | 2 min                  | 30 min                                          |

<sup>1)</sup> for wet base material the curing time must be doubled


# WIT-UH 300 WITH THREADED ROD (METRIC)

## Installation parameters

| Anchor size                                                |                                        |      | M8                                           | M10 | M12              | M16             | M20 | M24 | M27 | M30 |
|------------------------------------------------------------|----------------------------------------|------|----------------------------------------------|-----|------------------|-----------------|-----|-----|-----|-----|
| Diameter of element                                        | $d = d_{nom}$                          | [mm] | 8                                            | 10  | 12               | 16              | 20  | 24  | 27  | 30  |
| Nominal drill hole diameter                                | $d_o$                                  | [mm] | 10                                           | 12  | 14               | 18              | 22  | 28  | 30  | 35  |
| Effective anchorage depth                                  | $h_{ef,min}$                           | [mm] | 60                                           | 60  | 70               | 80              | 90  | 96  | 108 | 120 |
|                                                            | $h_{ef,max}$                           | [mm] | 160                                          | 200 | 240              | 320             | 400 | 480 | 540 | 600 |
| Diameter of clearance in hole in the fixture <sup>1)</sup> | Prepositioned installation $d_{f\leq}$ | [mm] | 9                                            | 12  | 14               | 18              | 22  | 26  | 30  | 33  |
|                                                            | Push through installation $d_f$        | [mm] | 12                                           | 14  | 16               | 20              | 24  | 30  | 33  | 40  |
| Maximum torque moment                                      | $\max T_{inst} \leq$                   | [Nm] | 10                                           | 20  | 40 <sup>2)</sup> | 60              | 100 | 170 | 250 | 300 |
| Minimum thickness of member                                | $h_{min}$                              |      | $h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$ |     |                  | $h_{ef} + 2d_o$ |     |     |     |     |
| Minimum spacing                                            | $s_{min}$                              | [mm] | 40                                           | 50  | 60               | 75              | 95  | 115 | 125 | 140 |
| Minimum edge distance                                      | $c_{min}$                              | [mm] | 35                                           | 40  | 45               | 50              | 60  | 65  | 75  | 80  |

<sup>1)</sup> For application under seismic loading the diameter of clearance hole in the fixture shall be at maximum  $d + 1 \text{ mm}$  or alternatively the annular gap between fixture and anchor rod shall be filled force-fit with mortar

<sup>2)</sup> Maximum Torque moment for M12 with steel Grade 4.6 is 35 Nm

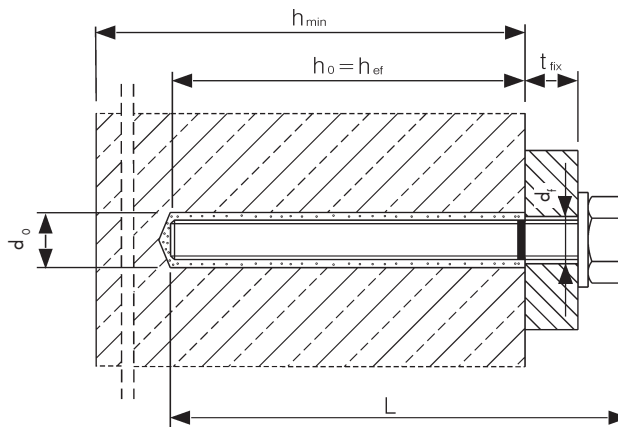

## Installation instructions

### A) Bore hole drilling

|  |                                                                                                                                                                                                                                                                                                              |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>1a. Hammer (HD) or compressed air drilling (CD)</b>                                                                                                                                                                                                                                                       |
|  | <p>Drill a hole into the base material to the size and embedment depth required by the selected reinforcing bar. Proceed with Step B. In case of aborted drill hole, the drill hole shall be filled with mortar.</p>                                                                                         |
|  | <b>1b. Hollow drill bit system (HDB)</b>                                                                                                                                                                                                                                                                     |
|  | <p>Drill a hole into the base material to the size and embedment depth required by the selected anchor. This drilling system removes the dust and cleans the bore hole during drilling (all conditions). Proceed with Step C. In case of aborted drill hole, the drill hole shall be filled with mortar.</p> |

### B) Bore hole cleaning

MAC: Cleaning for bore hole diameter  $d_0 \leq 20$  mm and bore hole depth  $h_0 \leq 10 d_{nom}$  (non-cracked concrete only!)

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p><b>2a.</b> Starting from the bottom or back of the bore hole, blow the hole clean using a hand pump a minimum of four times.</p> <p><b>2b.</b> Check brush diameter. Brush the hole with an appropriate sized wire brush <math>&gt; d_{b,min}</math> a minimum of four times in a twisting motion. If the bore hole ground is not reached with the brush, a brush extension shall be used.</p> <p><b>2c.</b> Finally blow the hole clean again with a hand pump a minimum of four times.</p> |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

CAC: Cleaning for dry, wet and water-filled bore holes with all diameters non-cracked and cracked concrete

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p><b>2a.</b> Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) a minimum of four times until return air stream is free of noticeable dust. If the bore hole ground is not reached an extension shall be used.</p> <p><b>2b.</b> Check brush diameter. Brush the hole with an appropriate sized wire brush <math>&gt; d_{b,min}</math> a minimum of four times. If the bore hole ground is not reached with the brush, a brush extension shall be used.</p> <p><b>2c.</b> Finally blow the hole clean again with compressed air (min. 6 bar) a minimum of four times until return air stream is free of noticeable dust. If the bore hole ground is not reached, an extension shall be used.</p> |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**After cleaning, the bore hole has to be protected against re-contamination in an appropriate way, until dispensing the mortar in the bore hole. If necessary, the cleaning has to be repeated directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.**

## WIT-UH 300 WITH THREADED ROD (METRIC)

| C) Preparation of anchor rod and cartridge |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                            | <p><b>3a.</b> Attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. For every working interruption longer than the recommended working time as well as for every new cartridge, a new static-mixer shall be used.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                                            | <p><b>3b.</b> Prior to inserting the anchor rod into the filled bore hole, the position of the embedment depth shall be marked on the anchor rod.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                                            | <p><b>3c.</b> Prior to dispensing into the bore hole, squeeze out separately the mortar until it shows a consistent grey or red color (minimum of three full strokes) and discard non-uniformly mixed adhesive components.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| D) Filling the bore hole                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                                            | <p><b>4.</b> Starting from the bottom or back of the cleaned bore hole, fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. If the bottom or back of the anchor hole is not reached, an appropriate extension nozzle must be used. Observe the gel-/ working times.</p> <p>Piston plugs and mixer nozzle extensions shall be used for the following applications:</p> <ul style="list-style-type: none"> <li>• Horizontal assembly (horizontal direction) and ground erection (vertical downwards direction):<br/>Drill bit-<math>\varnothing</math> <math>d_0 \geq 18</math> mm and embedment depth <math>h_{ef} &gt; 250</math> mm</li> <li>• Overhead assembly (vertical upwards direction):<br/>Drill bit-<math>\varnothing</math> <math>d_0 \geq 18</math> mm</li> </ul> |

| E) Setting the anchor rod |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                           | <p><b>5a.</b> Push the threaded rod into the bore hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached. The bar should be free of dirt, grease, oil or other foreign material.</p>                                                                                                                                                                                                                   |
|                           | <p><b>5b.</b> After inserting the anchor, the annular gap between the anchor rod and concrete, in case of a push through installation, additionally also the fixture, must be completely filled with mortar. If excess mortar is not visible at the top of the hole, the requirement is not fulfilled and the application has to be renewed. For overhead application, the anchor rod shall be fixed (e.g. wedges).</p>                                          |
|                           | <p><b>5c.</b> Allow the adhesive to cure to the specified time prior to applying any load or torque. Do not move or load the anchor until it is fully cured.</p>                                                                                                                                                                                                                                                                                                 |
|                           | <p><b>5d.</b> After fully curing, the add-on part can be installed with up to the max. torque by using a calibrated torque wrench. In case of prepositioned installation, the annular gap between anchor and fixture can be optionally filled with mortar. Therefore, substitute the washer by the filling washer and connect the mixer reduction nozzle to the tip of the mixer. The annular gap is filled with mortar when mortar oozes out of the washer.</p> |

WIT-UH 300 M

## WIT-UH 300 WITH THREADED ROD (METRIC)

### Filling Quantity

#### Anchor type: M8 - M30

| Anchor size                             |             |      | M8         | M10  | M12  | M16  | M20  | M24  | M27  | M30  |
|-----------------------------------------|-------------|------|------------|------|------|------|------|------|------|------|
| Nominal drill hole diameter             | $d_0$       | [mm] | 10         | 12   | 14   | 18   | 22   | 28   | 30   | 35   |
| Drill depth                             | $h_0 / h_1$ | [mm] | $= h_{ef}$ |      |      |      |      |      |      |      |
| Filling volume per 10mm embedment depth |             | [ml] | 0.53       | 0.70 | 0.89 | 1.27 | 1.78 | 3.35 | 3.22 | 5.10 |

Assumed waste of 15 % included.

